


# WoodenBoat Regatta Series

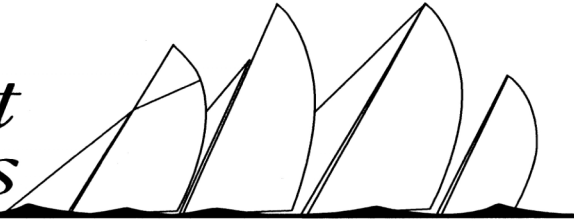

## 2011 Measurement Sheet and Roster Information

Name of vessel \_\_\_\_\_ Sail Number \_\_\_\_\_  
 Rig \_\_\_\_\_ Year Built \_\_\_\_\_ Designer \_\_\_\_\_ Builder \_\_\_\_\_  
 Hull Color \_\_\_\_\_ Deck Color \_\_\_\_\_ Construction \_\_\_\_\_  
 Owner's Name \_\_\_\_\_ Class or Type \_\_\_\_\_  
 Address \_\_\_\_\_ E-mail \_\_\_\_\_  
 Telephone (\_\_\_\_) \_\_\_\_\_  
 Cell (\_\_\_\_) \_\_\_\_\_

*All measurements in feet and inches, to the nearest inch.*

### Hull Measurements (turn over for explanations)

LOA: \_\_\_\_\_ (excluding bowsprits and/or boomkins)  
 LWL: \_\_\_\_\_ BEAM: \_\_\_\_\_ (excluding rubrails)  
 DRAFT: \_\_\_\_\_ (centerboard up, if applicable)  
 Propeller type: \_\_\_ Fixed \_\_\_ Folding \_\_\_ Feathering \_\_\_ None/Installation: \_\_\_ In aperture \_\_\_ Exposed  
 Number of Blades: \_\_\_ Two \_\_\_ Three \_\_\_ Four  
 Displacement in lbs. (if known): \_\_\_\_\_

### Rig Measurements (Complete appropriate section only)

#### Schooner:

Check below if gaff-headed:

\_\_\_ Main \_\_\_ Fore \_\_\_ Mizzen

P2 \_\_\_\_\_

J \_\_\_\_\_ LP \_\_\_\_\_

P \_\_\_\_\_ PY \_\_\_\_\_

B \_\_\_\_\_ BY \_\_\_\_\_

P1 \_\_\_\_\_

P3 \_\_\_\_\_

B1 \_\_\_\_\_

#### Ketch, Yawl, Sloop, or Cutter:

Check Type:

\_\_\_ Ketch \_\_\_ Yawl \_\_\_ Sloop \_\_\_ Cutter

Check if gaff-headed:

\_\_\_ Main \_\_\_ Mizzen

P2 \_\_\_\_\_

J \_\_\_\_\_

LP \_\_\_\_\_

P \_\_\_\_\_ PY \_\_\_\_\_

B \_\_\_\_\_ BY \_\_\_\_\_

For All Rigs P2(spin) \_\_\_\_\_ SPL \_\_\_\_\_ see definitions

Signature of Owner: \_\_\_\_\_ Date: \_\_\_\_\_

*To obtain a rating certificate, mail this completed form along with a check in the amount of \$25.00 (payable to CRF Group) to the following address:*

CRF GROUP  
 PO BOX 319  
 MYSTIC, CT 06355-0319  
 Tel. 860.460.3990 Fax 860.572.9271 E-mail: mischief@snet.net

## Rig Definitions

P2 Distance from highest halyard block for headsails to main deck.

**P2(spin)Spinnaker halyard block to main deck, if higher than P2.**

J Horizontal distance from forward side of foremost mast to the intersection of the forwardmost stay with the deck, stem, or bowsprit.

**LP (optional) Perpendicular distance from Clew to Luff of largest headaail**

**SPL Length of Spinnaker Pole, if longer than J.**

P Hoist of mainsail. (To peak halyard block for gaff-rigged sails)

B Distance from afterside of mainmast to position to which mainsail clew can be extended.

P1 Distance from top of foreboom to the highest halyard block used for sail on the after side of the foremast.

P3 Distance from the top of the foreboom, or extension thereof when foreboom is resting parallel to waterline, to the highest halyard block used for sail forward of the mainmast. If no fisherman is carried, use highest halyard block on the afterside of the mainmast.

B1 Distance from the foreside of the mainmast to afterside of the foremast.

PY Hoist of mizzensail. (To peak halyard block on mast for gaff-rigged vessels)

BY Distance from afterside of mizzenmast to position to which mizzen clew can be extended.

